



USB
REAL-TIME SPECTRUM
ANALYZER

SAN-400 SERIES
40 GHz

Key facts

Create your own RF system with limited budget

Frequency range: 9 kHz to 40 GHz

1 GHz DANL: -161 dBm/Hz

1 GHz phase noise: -107 dBc/Hz@10 kHz

Analysis bandwidth: up to 100 MHz

USB3.0/2.0 type C interface

Highly compatible API interface

ARM and X86 processor are supported


Linux and Windows operating systems are supported

Applications

Standard spectrum sweep




IQ streaming and analysis

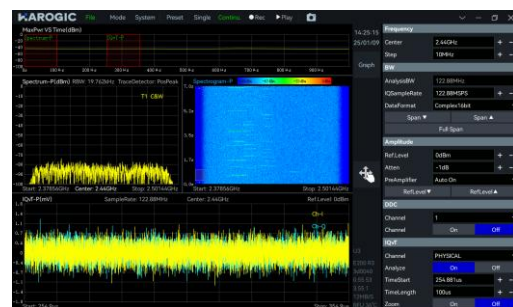

Power vs time measurement



Real-time analysis

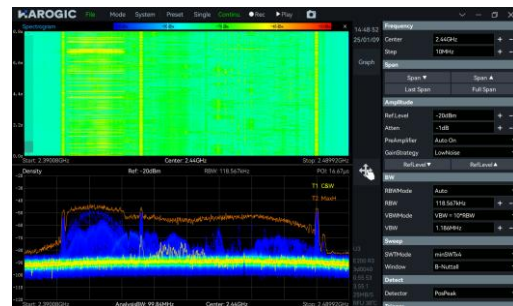

Specifications*

FREQUENCY

Frequency range	SAN-400 R2		-
	9 kHz-40 GHz		-
Reference clock	Internal or external		
Frequency accuracy	OCXO (std.)		<1 ppm, manual correction is available
	Ext. GNSS disciplined (opt23)	OCXO	<0.05 ppm, when locked to GNSS
Aging and temperature stability	OCXO (std.)		<1 ppm/year, <0.15 ppm
	Ext. GNSS disciplined (opt23)	OCXO	<1 ppm/year, <0.05 ppm

SPECTRUM PURITY

SSB phase noise (dBc/Hz)				
	SAN-400 R2		-	
Carrier frequency	1 GHz	40 GHz	-	-
1 kHz	-99.0	-78.4	-	-
10 kHz	-107.5	-85.7	-	-
100 kHz	-107.7	-85.1	-	-
1 MHz	-122.7	-100.8	-	-
Residual response (dBm)				
spur reject = bypass				
RBW =1 kHz				
PosPeak detector				
	SAN-400 R2		-	
Reference level (R.L.)	0 dBm	-50 dBm	-	-
9 kHz-10 GHz	-72	-103	-	-
10 GHz-20 GHz	-91	-115	-	-
20 GHz-40 GHz	-85	-105	-	-
Image rejection				
spur reject = standard				
90 MHz-33 GHz	>90 dBc (typ.)		-	
33 GHz-40 GHz	>58 dBc (typ.)		-	

IF rejection	>90 dBc; 8.2 GHz~21.75 GHz, >68 dBc
Local oscillator related spurious	<-65 dBc Center frequency $\pm (N/M)*100$ MHz, N,M = 1,2,3,4,5...

IIP3 / IIP2 (dBm)				
SAN-400 R2				
Carrier frequency	1 GHz	40 GHz	-	-
R.L. = 20 dBm	40.3 / 75.5	31.7 / 88.6	-	-
R.L. = 0 dBm	27.4 / 45.3	10.3 / 86.1	-	-
R.L. = -20 dBm	8.7 / 25.2	4.8 / 66.6	-	-

AMPLITUDE

Max. input power (CW)	23 dBm	90 MHz-40 GHz and the preamplifier is off		
	10 dBm	9 kHz-90 MHz or preamplifier is on		
Max. DC voltage	± 10 VDC			
Display range	DANL-23 dBm (typ.)			
Amplitude accuracy	9 kHz-9.5 GHz	± 2.0 dB		
	9.5 GHz-40 GHz	± 3.0 dB		
IF in-band flatness	± 2.0 dB			
Reference level (R.L.)	-50 dBm-23 dBm (typ.)			
RF preamplifiers	automatically turn on or forcibly turn off			
VSWR	90 MHz-16 GHz	<2.0:1		
	16 GHz-40 GHz	<3.0:1		

Display average noise level (DANL) (dBm/Hz)
RBW=10 kHz

SAN-400 R2				
Reference level	-20 dBm	-50 dBm	-	-
9 kHz	-134	-145	-	-
100 kHz - 88 MHz	-151	-157	-	-
88 MHz - 9.0 GHz	-148	-154	-	-
9.0 GHz - 19 GHz	-153	-158	-	-
19 GHz - 40 GHz	-146	-147	-	-

STANDARD SPECTRUM ANALYSIS

Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower
RBW	0.1 Hz-10 MHz
VBW	0.1 Hz-10 MHz
Data chart	SASudio4 software provides spectrum, waterfall chart, and historical trace
Measurements	Channel power, OBW, X dB bandwidth, Adjacent channel power ratio, IM3

Sweep speed	SAN-400 R2	-
RBW \geq 1 MHz FPGA spur reject = standard	about 590 GHz/s	-
RBW = 250 kHz FPGA spur reject = standard	about 571 GHz/s	-
RBW = 30 kHz FPGA spur reject = standard	about 21 GHz/s	-
RBW = 1 kHz CPU spur reject = standard	about 2.3 GHz/s	-

IQ RECORDING

Burst recording bandwidth	Maximum: 100 MHz The built-in memory depth is 128 Mbytes
Continuous recording bandwidth	Maximum: 50 MHz Limited by the bandwidth of USB interface and hard disk. The storage depth is limited by the hard disk capacity
IQ sample rate	125MSPS, decimate factor: 1,2,4,8,32,64,128,256,512,1024,2048,4096 supported (FPGA)
External trigger response	Maximum response frequency 500 times/sec

DETECTION ANALYSIS/ZERO SPAN

Lowest time resolution	8 ns
Max. analysis bandwidth	100 MHz
Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower

REAL TIME SPECTRUM ANALYSIS

FFT analysis

FFT engine is implemented in FPGA. Frame compression and trace detection are supported. No missing samples between FFT frames

FFT frame update rate= 10^9 ns/(N * D * 8 ns); POI = N * D * 8 ns
 N for FFT points (2048,1024,512,256,128,64,32)
 D for decimate factor (1, 2, 4, 8...)

Typical settings	FFT refresh rate	POI
N = 2048, D = 1	61,035 times/sec	16.384 us
N = 32, D = 1	3,906,250 times/sec	0.256 us

Max. analysis bandwidth 100 MHz

Window function B-Nuttall, Flat-top, LowSideLobe

RBW 14.73 MHz-3.59 kHz (Flat-top)
 7.81 MHz-1.90 kHz (B-Nuttall)
 13 grades for each window type

Amplitude resolution 0.75 dB

GENERAL

Input and output

Power supply Type-C, dedicated power supply port. Acceptable voltage range: 4.75 to 5.25 V (ripple < 0.2 Vpp). Device will fetch up to 2 A current from this port

Data interface Type-C, USB3.0 and USB2.0 (limited bandwidth)
 Device will fetch up to 1 A current from this port

RF input 2.92 mm (F), Input impedance 50 Ω

Reference input MMCX (F), amplitude ≥ 1.5 Vpp, input impedance is 300 Ω

Reference output Integrated in MUXIO, 3.3 V CMOS, programmable on/off

External trigger input Integrated in MUXIO, 3.3 V CMOS, input: high impedance

External trigger output Integrated in MUXIO, 3.3 V CMOS

Analog IF output MMCX (F), maximum output power – 25 dBm, output impedance 50 Ω
 Supporting, 307.2 MHz±50 MHz

Power consumption 10-14 W

Enclosure Core with no enclosure and fan is provided

SAN-400 R2		
Size (D * W * H) and weight	139 x68 x31 mm and about 420 g	-
GNSS synchronization	External GNSS (opt21)	+/- 100 ns
	External GNSS (opt22)	+/- 75 ns
	External GNSS (opt23)	+/- 50 ns
System requirements	Linux	aarch64, x64
	Windows	x64
Operating temperature (ambient/core)	T0 class (std.)	0-50 °C/0-70 °C
	T1 class (opt40)	-20-65 °C/-20-85 °C
	T2 class (opt41)	-40-85 °C (core)
Storage temperature (ambient)	T0 class (std.)	-20-70 °C
	T1 class (opt40)	-40-85 °C
	T2 class (opt41)	-40-85 °C (core)
Packaging and accessories	Flash disk * 1, USB 3.0 cable * 2, Power adapter * 1	

*Specification applies under the following conditions:

- (1) Start up and warm up for 10 minutes
- (2) Ambient temperature 25 °C (core temperature 50 °C)
- (3) Stand spectrum analysis mode-spurious rejection enhance on.
- (4) Necessary heat dissipation is provided to ensure the ambient and core temperature within the rated range at the same time

OPTIONS

Code		
20	MUXIO IO board	accessory
21	External GNSS	accessory
22	External high precision GNSS	accessory
23	External GNSS disciplined OCXO reference clock	accessory
34	External omnidirectional antenna, 400-8000MHz, Gain<2dBi	accessory
40	T1 temperature class	built-in hardware
41	T2 temperature class, only available for core	built-in hardware
71	Basic digital modulation analysis	software
72	Pulse signal measurement	software



 www.harogic.com

 info@harogic.com