



USB REAL-TIME SPECTRUM ANALYZER

SAN-400 SERIES
40 GHz

Key facts

Frequency range: 9 kHz - 40 GHz

1 GHz DANL: -163 dBm/Hz

1 GHz phase noise: -107 dBc/Hz@10 kHz

Analysis bandwidth: up to 100 MHz

USB3.0/2.0 type C interface

Highly compatible API interface


Windows 11/10/8/7 (x86, x64) are supported

Debian 12/11/10 (x64, AArch64) are supported


Ubuntu 24.04/22.04/20.04/18.04 (x64, AArch64) are supported

Applications

Standard spectrum sweep

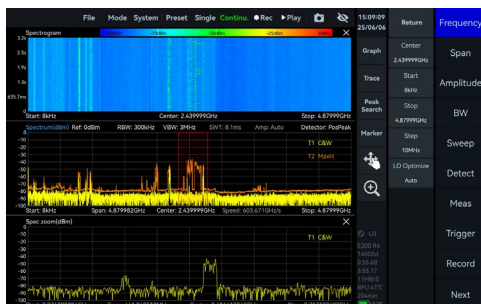


IQ streaming and analysis

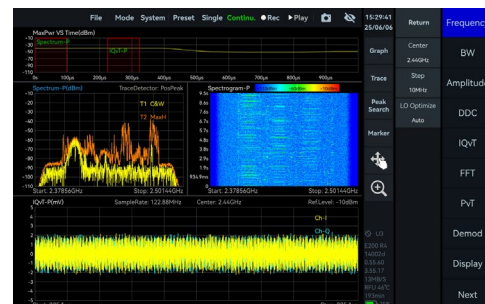

Power vs time measurement



Real-time analysis

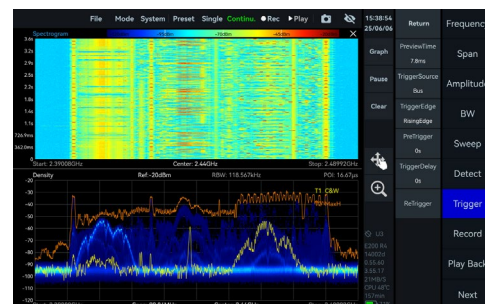

Specifications*

FREQUENCY

Frequency range	SAN-400 R2		-
	9 kHz - 40 GHz		-
Reference clock	Internal or external		
Frequency accuracy	TXCO (std.)	<1 ppm, manual correction is available	
	OCXO (opt01)	<1 ppm, manual correction is available	
	Ext. GNSS disciplined OCXO (opt23)	<0.05 ppm, when locked to GNSS	
Aging and temperature stability	TXCO (std.)	<1 ppm/year, <1 ppm	
	OCXO (opt01)	<1 ppm/year, <0.15 ppm	
	Ext. GNSS disciplined OCXO (opt23)	<1 ppm/year, <0.05 ppm	

SPECTRUM PURITY

SSB phase noise (dBc/Hz)				
SAN-400 R2				
Carrier frequency	1 GHz	40 GHz	-	-
1 kHz	-99.0	-78.4	-	-
10 kHz	-107.5	-85.7	-	-
100 kHz	-107.7	-85.1	-	-
1 MHz	-122.7	-100.8	-	-
Residual response (dBm)				
Spur reject = bypass				
RBW = 1 kHz				
PosPeak detector				
SAN-400 R2				
Reference level (R.L.)	0 dBm	-50 dBm	-	-
9 kHz - 10 GHz	-72	-103	-	-
10 GHz - 20 GHz	-91	-115	-	-
20 GHz - 40 GHz	-85	-105	-	-
Image rejection				
Spur reject = standard				
90 MHz - 33 GHz	SAN-400 R2		-	
	> 90 dBc (typ.)		-	

33 GHz - 40 GHz

> 58 dBc (typ.)

-

IF rejection

> 90 dBc; 8.2 GHz~21.75 GHz, > 68 dBc

Local oscillator related
spurious

<-65 dBc

Center frequency $\pm (N/M) * 100$ MHz, N,M = 1, 2, 3, 4, 5...

IIP3 / IIP2 (dBm)

SAN-400 R2

-

Carrier frequency

1 GHz

40 GHz

-

-

R.L. = 20 dBm

40.3/75.5

31.7/88.6

-

-

R.L. = 0 dBm

27.4/45.3

10.3/86.1

-

-

R.L. = -20 dBm

8.7/25.2

4.8/66.6

-

-

AMPLITUDE

Max. input power (CW)

20 dBm

50 MHz - 40 GHz and the preamplifier is off

8 dBm

9 kHz - 50 MHz or preamplifier is on

Max. DC voltage

 ± 10 VDC

Display range

DANL-20 dBm (typ.)

Amplitude accuracy

9 kHz - 9.5 GHz

 ± 2.0 dB

9.5 GHz - 40 GHz

 ± 3.0 dB

IF in-band flatness

 ± 2.0 dB

Reference level (R.L.)

-50 dBm - 20 dBm (typ.)

RF preamplifiers

Automatically turn on or forcibly turn off

VSWR

90 MHz - 16 GHz

<2.0:1

16 GHz - 40 GHz

<3.0:1

Display average noise level
(DANL) (dBm/Hz)

RBW=1 kHz

SAN-400 R2

-

Reference level

-20 dBm

-50 dBm

-

-

9 kHz - 1 MHz

-136.0

-145.8

-

-

1 MHz - 88 MHz

-153.7

-158.0

-

-

88 MHz - 9.0 GHz

-154.1

-159.9

-

-

9.0 GHz - 19 GHz

-156.8

-161.5

-

-

19 GHz - 40 GHz

-145.2

-149.3

-

-

STANDARD SPECTRUM ANALYSIS

Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower
RBW	0.1 Hz - 10 MHz
VBW	0.1 Hz - 10 MHz
Data chart	SASudio4 software provides spectrum, spectrogram, and historical trace
Measurements	Channel power, OBW, X dB bandwidth, Adjacent channel power ratio, IM3

Sweep speed	SAN-400 R2	-
RBW $\geq$ 1 MHz FPGA spur reject = standard	about 572.0 GHz/s	-
RBW = 250 kHz FPGA spur reject = standard	about 598.9 GHz/s	-
RBW = 50 kHz FPGA spur reject = standard	about 22.9 GHz/s	-
RBW = 1 kHz CPU spur reject = standard	about 2.2 GHz/s	-

IQ RECORDING

Burst recording bandwidth	Maximum: 100 MHz The built-in memory depth is 128 Mbytes
Continuous recording bandwidth	Maximum: 50 MHz Limited by the bandwidth of USB interface and hard disk. The storage depth is limited by the hard disk capacity
IQ sample rate	Maximum: 125 MSPS decimate factor: 1, 2, 4, 8, 32, 64, 128, 256, 512, 1024, 2048, 4096
External trigger response	Maximum response frequency 500 times/s

DETECTION ANALYSIS

Lowest time resolution	8 ns
Max. analysis bandwidth	100 MHz

Detector

PosPeak, NegPeak, Sample, Average, RMS, MaxPower

**REAL TIME
SPECTRUM ANALYSIS****FFT analysis**

FFT engine is implemented in FPGA. Frame compression and trace detection are supported. No missing samples between FFT frames

$$\text{FFT frame update rate} = 10^9 \text{ ns} / (N * D * 8 \text{ ns}); \text{POI} = N * D * 8 \text{ ns}$$

N for FFT points (2048, 1024, 512, 256, 128, 64, 32)
D for decimate factor (1, 2, 4, 8...)

Typical settings	FFT refresh rate	POI
N = 2048, D = 1	61,035 times/s	16.384 us
N = 32, D = 1	3,906,250 times/s	0.256 us

Max. analysis bandwidth	100 MHz
Window function	B-Nuttall, Flat-top, LowSideLobe
RBW	14.73 MHz - 3.59 kHz (Flat-top) 7.81 MHz - 1.90 kHz (B-Nuttall) 13 grades for each window type
Amplitude resolution	0.75 dB

GENERAL**Input and output**

Power	Type-C, power supply dedicated port, please provide 5V2A peak power supply capacity Allowable voltage range 4.75 - 5.25 V, ripple less than 200mVp
Data interface	Type-C, USB 3.0 (USB 2.0 available but bandwidth limited) Device will fetch up to 1 A current from this port
RF input	2.92 mm (F), Input impedance 50 Ω
External reference clock input	MMCX (F), amplitude ≥ 1.5 Vpp, input impedance is 330 Ω
Reference clock output	Integrated in MUXIO, 3.3 V CMOS, programmable on/off
External trigger input	Integrated in MUXIO, 3.3 V CMOS, input: high impedance
Trigger output	Integrated in MUXIO, 3.3 V CMOS
Analog IF output	MMCX (F), maximum output power - 25 dBm, output impedance 50 Ω Supporting, 307.2 MHz $\pm$ 50 MHz
Power consumption	10-14 W

Size (D * W * H) and weight	SAN-400 R2	-
	139 * 68 * 31 mm and about 420 g	-
GNSS synchronization	External GNSS (opt21)	±100 ns
	External GNSS (opt22)	±75 ns
	External GNSS (opt23)	±50 ns
System requirements	Windows 11/10/8/7	x86, x64
	Debian 12/11/10	x64, AArch64
	Ubuntu 24.04/22.04/20.04/18.04	x64, AArch64
Operating temperature (ambient/core)	T0 class (std.)	0 - 50 °C/0 - 70 °C
	T1 class (opt40)	-20 - 65 °C/-20 - 85 °C
	T2 class (opt41)	-40 - 85 °C (core)
Storage temperature (ambient)	T0 class (std.)	-20 - 70 °C
	T1 class (opt40)	-40 - 85 °C
	T2 class (opt41)	-40 - 85 °C (core)
Packaging and accessories	Flash disk * 1, USB 3.0 cable * 2, Power adapter * 1	

*Specification applies under the following conditions:

(1) Start up and warm up for 10 minutes

(2) Ambient temperature 25 °C (core temperature 50 °C)

(3) Stand spectrum analysis mode-spurious rejection enhance on.

(4) Necessary heat dissipation is provided to ensure the ambient and core temperature within the rated range at the same time

(5) Sweep speed and display average noise level test conditions: MCU:0.55.57,FPGA:0.55.22,API:0.55.61

OPTIONS

Code		
01	Built-in OCXO reference clock	built-in hardware
20	MUXIO IO board	accessory
21	External GNSS	accessory
22	External high precision GNSS	accessory
23	External GNSS disciplined OCXO reference clock	accessory
34	External omnidirectional antenna, 400-8000MHz, Gain<2dBi	accessory
40	T1 temperature class	built-in hardware
41	T2 temperature class, only available for core	built-in hardware
71	Basic digital demodulation	software
72	Pulse detection	software



 www.harogic.com

 info@harogic.com