




HANDHELD REAL-TIME SPECTRUM ANALYZER

PXE SERIES
9.5/20 GHz

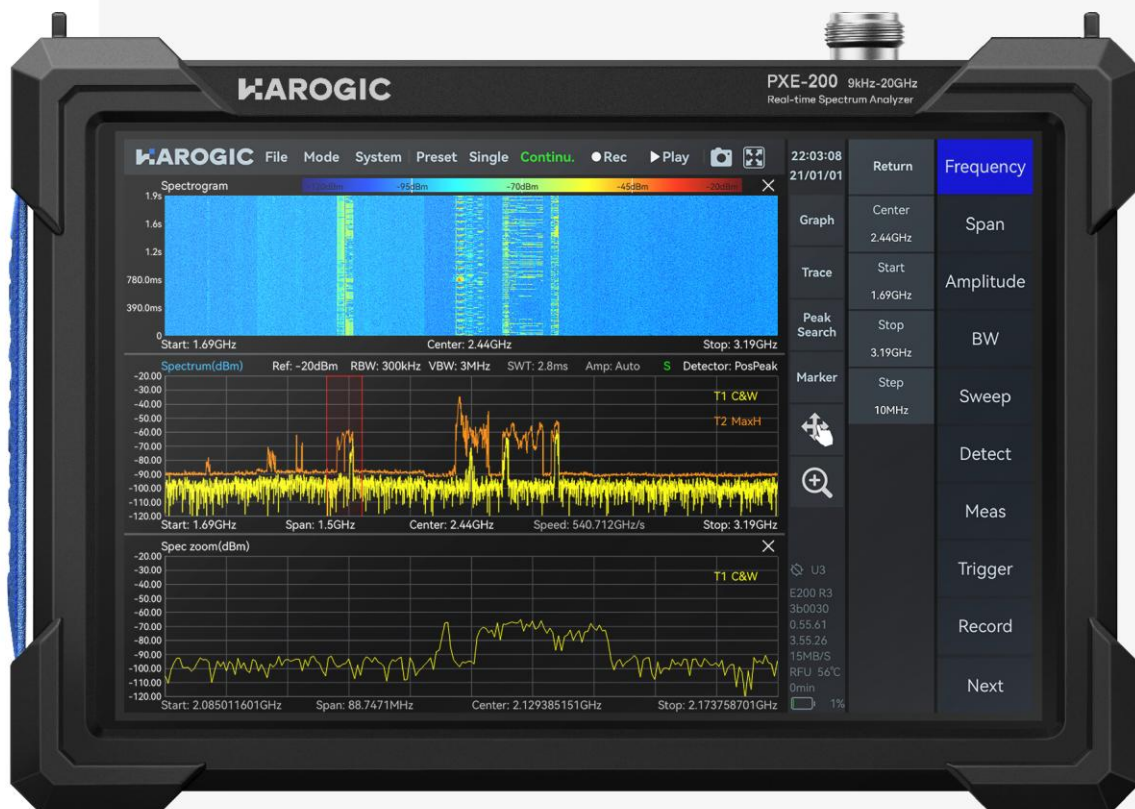

PXE SERIES OVERVIEW

Key facts

Portable makes possible

1.5 kg lightweight, 10.1-inch multi touchscreen

Frequency range: 9 kHz - 9.5/20 GHz

1 GHz DANL: -166 dBm/Hz

1 GHz phase noise: -99.7 dBc/Hz@10 kHz


Analysis Bandwidth: 100 MHz

Channel power, phase noise, occupied bandwidth measurements, etc., as standard


3 hours operation time, external power bank supported

Applications

Standard spectrum sweep

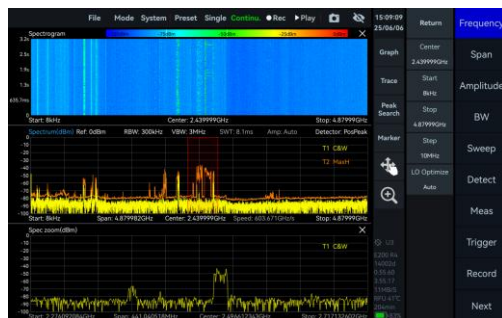

IQ streaming and analysis

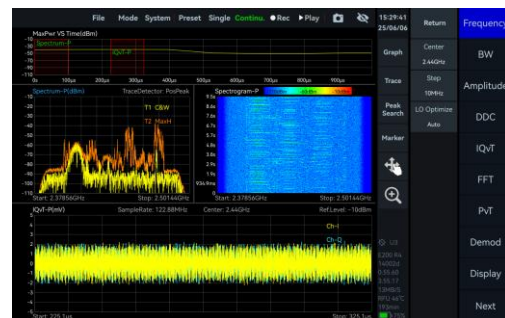

Power vs time measurement




Real-time analysis





Applications


Channel power/ACPR

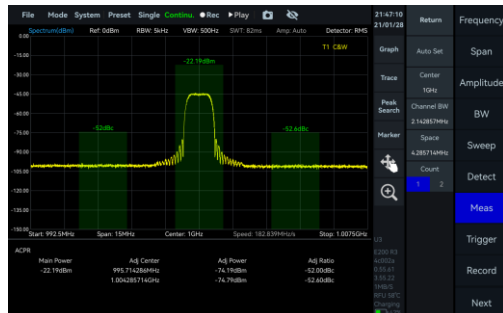

Phase noise




Frequency tracking

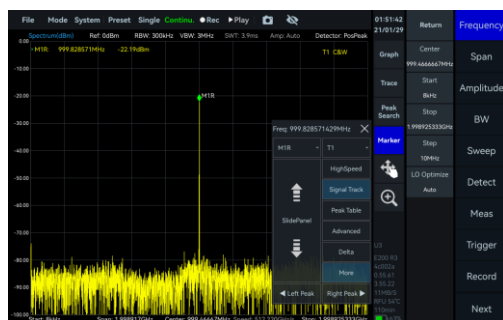


Pulse signal measure



AM/FM demodulation

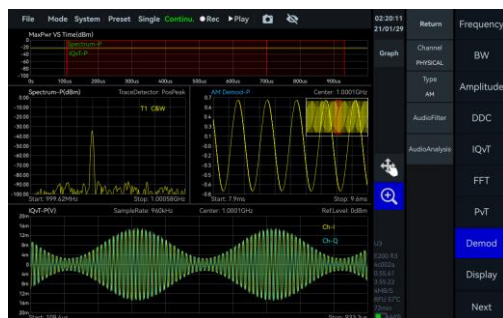

Basic digital demodulation

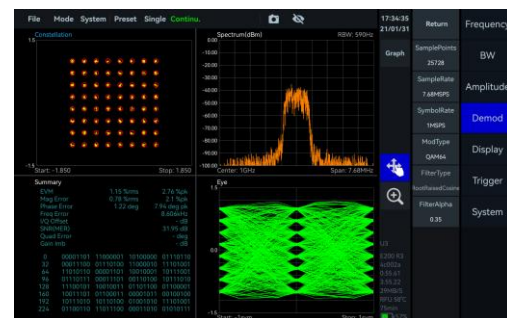

Specifications*

FREQUENCY

Frequency range	PXE-90	PXE-200
	9 kHz - 9.5 GHz	9 kHz - 20 GHz
Reference clock	Internal or external	
Frequency accuracy	TCXO (std.)	<1 ppm, manual correction is available
	OCXO (opt01)	<1 ppm, manual correction is available
Aging and temperature stability	TCXO (std.)	<1 ppm/year, <1 ppm
	OCXO (opt01)	<1 ppm/year, <0.15 ppm

SPECTRUM PURITY

SSB phase noise (dBc/Hz)				
	PXE-90		PXE-200	
Carrier frequency	1 GHz	9.5 GHz	1 GHz	20 GHz
1 kHz	-95.2	-91.5	-91.2	-80.6
10 kHz	-101.6	-98.5	-99.7	-90.6
100 kHz	-100.6	-99.7	-101.1	-96.2
1 MHz	-120.9	-116.2	-121.6	-111.5
Residual response (dBm)				
Spur reject = bypass				
RBW =1 kHz				
PosPeak detector				
	PXE-90		PXE-200	
Reference level (R.L.)	0 dBm	-50 dBm	0 dBm	-50 dBm
9 kHz - 1 GHz	-83	-120	-90	-120
1 GHz - 3 GHz	-83	-120	-80	-120
3 GHz - 9.5/20 GHz	-90	-130	-90	-120
Image rejection				
	PXE-90		PXE-200	
9 kHz - 3 GHz	>90 dBc (typ.)		>90 dBc (typ.)	
3 GHz - 9.5 GHz	>90 dBc(typ.), spur reject = enhanced >60 dBc (typ.), spur reject = bypass		>90 dBc (typ.)	
9.5 GHz - 20 GHz	-		>90 dBc(typ.), spur reject = enhanced >60 dBc (typ.), spur reject = bypass	

IF rejection	>90 dBc (typ.), spur reject = enhanced >80 dBc (typ.), spur reject = bypass
Local oscillator related spurious	<-65 dBc Center frequency $\pm (N/M) * 125$ MHz, N, M = 1, 2, 3, 4, 5...

IIP3 / IIP2 (dBm)				
	PXE-90		PXE-200	
Carrier frequency	1 GHz	9.5 GHz	1 GHz	20 GHz
R.L. = 20 dBm	46.1/83.2	40.5/92.8	45.5/82.6	35.3/93.6
R.L. = 0 dBm	26.7/85.0	19.2/90.3	25.5/81.1	21.0/89.0
R.L. = -20 dBm	10.5/82.2	2.0/49.3	7.9/81.5	-4.5/55.3

AMPLITUDE

Max. input power (CW)	23 dBm	50 MHz - 9.5/20 GHz and the preamplifier is off
	10 dBm	9 kHz - 50 MHz or preamplifier is on
Max. DC voltage	± 10 VDC	
Display range	DANL - 23 dBm (typ.)	
Amplitude accuracy	9 kHz - 9.5 GHz	± 2.0 dB
	9.5 GHz - 20 GHz	± 3.0 dB
IF in-band flatness	± 2.0 dB	
Reference level (R.L.)	-50 dBm - 23 dBm (typ.)	
RF preamplifiers	Automatically turn on or forcibly turn off	
VSWR	<2.0:1	
90 MHz to Max.Freq.		

Display average noise level
(DANL) (dBm/Hz)
RBW = 1 kHz

	PXE-90		PXE-200	
Reference level	-20 dBm	-50 dBm	-20 dBm	-50 dBm
9 kHz - 1 MHz	-143.0	-152.4	-143.6	-152.6
1 MHz - 90 MHz	-153.0	-159.2	-151.8	-160.0
90 MHz - 3.0 GHz	-146.0	-167.5	-149.7	-166.3
3.0 GHz - 9.5 GHz	-153.6	-167.0	-151.4	-157.5
9.5 GHz - 20 GHz	-	-	-156.1	-160.6

STANDARD SPECTRUM ANALYSIS

Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower
RBW	1 Hz - 10 MHz
VBW	1 Hz - 10 MHz
Data chart	SASudio4 software provides spectrum, spectrogram, and historical trace
Measurements	Channel power, OBW, X dB bandwidth, Adjacent channel power ratio, IM3

Sweep speed	PXE-90	PXE-200
RBW $\geq$ 1 MHz FPGA Spur reject = bypass	about 1.0 THz/s	about 1.1 THz/s
RBW = 250 kHz FPGA Spur reject = standard	about 577.5 GHz/s	about 602.9 GHz/s
RBW = 50 kHz FPGA Spur reject = bypass	about 212.6 GHz/s	about 213.9 GHz/s
RBW = 1 kHz CPU Spur reject = bypass	about 2.6 GHz/s	about 2.8 GHz/s

IQ RECORDING

Burst recording bandwidth	Maximum: 100 MHz The built-in memory depth is 128 Mbytes
Continuous recording bandwidth	Maximum: 25 MHz Limited by the bandwidth of USB interface and hard disk The storage depth is limited by the hard disk capacity
IQ sample rate	Maximum: 125 MSPS decimate factor: 1, 2, 4, 8, 32, 64, 128, 256, 512, 1024, 2048, 4096
External trigger response	Maximum response frequency 500 times/s

DETECTION ANALYSIS

Lowest time resolution	8 ns
Max. analysis bandwidth	100 MHz
Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower

REAL TIME SPECTRUM ANALYSIS

FFT analysis	FFT engine is implemented in FPGA		
	Frame compression and trace detection are supported		
	No missing samples between FFT frames		
	FFT frame update rate= $10^9 \text{ ns}/(N * D * 8 \text{ ns})$; POI = $N * D * 8 \text{ ns}$ N for FFT points (2048, 1024, 512, 256, 128, 64, 32) D for decimate factor (1, 2, 4, 8...)		
	Typical settings	FFT refresh rate	POI
	N = 2048, D = 1	61,035 times/s	16.384 us
	N = 32, D = 1	3,906,250 times/s	0.256 us
Max. analysis bandwidth		100 MHz	
Window function		B-Nuttall, Flat-top, LowSideLobe	
RBW		14.73 MHz - 3.59 kHz (Flat-top) 7.81 MHz - 1.90 kHz (B-Nuttall) 13 grades for each window type	
Amplitude resolution		0.75 dB	

GENERAL

Input and output	
Power	USB PD (65 W)
USB port	USB3.0 Type-C * 1, USB2.0 Type-C * 1, USB2.0 Type-A * 1
Video and audio interface	Micro HDMI * 1 (support for extended display), 3.5mm headphone port * 1
RF input	N (F), Input impedance 50 Ω
External reference clock input	MMCX (F), amplitude $\geq 1.5 \text{ Vpp}$, input impedance is about 330 Ω
Reference clock output	Integrated in MUXIO, 3.3 V CMOS, programmable on/off
External trigger input	MMCX (F), 3.3 V CMOS, input: high impedance
Trigger output	MMCX (F), 3.3 V CMOS
Analog IF output	MMCX (F), maximum output power -25 dBm output impedance 50 Ω supported, 307.2 MHz $\pm$ 50 MHz
External Antenna Input	MMXC (F)
Display	IPS LCD 1280 * 800, 10.1-inch multi-touch screen
RAM and EMMC storage	4 GB/32 GB

Power consumption		25 W (typ.)
Size (D * W * H)		260 mm * 179 mm * 46 mm
Weight		1.5 kg
GNSS synchronization		Internal GNSS (only support external antenna), ±100 ns
Operating temperature (ambient)		0 - 50 °C
Storage temperature (ambient)		-20 - 70 °C
Operating Relative Humidity	0 -40 °C	5 – 75%
	>40 °C	5 – 45%
Packaging and accessories		Spectrum analyzer * 1, power adapter * 1, power cable * 1, lanyard*1

*Specification applies under the following conditions:

- (1) Start up and warm up for 10 minutes
- (2) Ambient temperature 25 °C (core temperature 50 °C)
- (3) Standard spectrum analysis mode-spurious rejection enhance on
- (4) Necessary heat dissipation is provided to ensure the ambient and core temperature within the rated range at the same time
- (5) Sweep speed and display average noise level test conditions: MCU:0.55.57,FPGA:0.55.22,API:0.55.61

OPTIONS

Code		
01	Built-in OCXO reference clock	built-in hardware
34	External omnidirectional antenna, 400-8000MHz, Gain<2dBi	accessory
71	Basic digital demodulation	software
72	Pulse detection	software



 www.harogic.com

 info@harogic.com