



USB Vector Network Analyzer

VNB-60
100 kHz - 6 GHz

VNB-60 Overview.

FOCUSED ON HIGH-QUALITY S-PARAMETER MEASUREMENTS AND MINIATURIZATION

The VNB-60 is highly optimized for basic S-parameter measurements. It incorporates high-performance directional couplers with an effective directivity of ≥ 40 dB and a professional receiver design that delivers a dynamic range of 100 dB to 120 dB. Its ultra-compact design makes it one of the smallest vector network analyzers available. This breakthrough combination of professional performance and extreme miniaturization greatly expands the application possibilities of the VNB-60 beyond conventional vector network analyzers.

EASY OPERATION AND RELIABLE MEASUREMENTS

The VNB-60 can be paired with the ECB-60 electronic calibration module and verified amplitude- and phase-stable cables to form a complete test solution. The dedicated ECB-60 significantly simplifies calibration while providing sufficient accuracy for most applications. The verified cables help prevent measurement errors caused by poor cable performance. Together with VNStudio, the VNB-60 provides an interactive experience comparable to, or even more convenient than, a benchtop vector network analyzer, making instrument setup, calibration, and S-parameter measurements more intuitive and efficient.

Key Features

- Frequency range: 100 kHz to 6 GHz
- Number of Ports: 2 ports
- High-performance directional coupler with effective directivity ≥ 40 dB
- Output power: -35 dBm to +5 dBm
- Dynamic range: 100 dB to 120 dB (typ.)
- Trace noise: ≤ 0.003 dBrms (typ.)
- IF bandwidth: 15 Hz to 75 kHz
- Sweep speed: 150 us/point at 75 kHz IF bandwidth
- Supports the ECB-60 electronic calibration module
- Supports validated amplitude- and phase-stable cables
- Supports SCPI commands
- Ultra-compact design: 86 × 70 × 36 mm

VNB-60 Interface Description



VNStudio Software Overview*

- Clear and User-Friendly Interface

VNStudio features a modular interface with five clearly organized functional areas: the menu bar, measurement display area, graph settings area, parameter settings area, and status information bar.




- Two-Port S-Parameter Measurements

Supports S11, S12, S21, and S22 measurements with multiple display formats, including logarithmic magnitude, linear magnitude, phase, real, imaginary, SWR, and Smith chart. Suitable for network parameter measurements of RF devices such as filters, amplifiers, cables, and antennas.




- Flexible Sweep and Scenario Configuration

Supports linear frequency, logarithmic frequency, power, and CW sweeps, with configurable IF bandwidth, sweep points, averaging, and dwell time. Built-in measurement scenarios for typical devices allow quick recall of sweep and trace configurations for efficient setup.

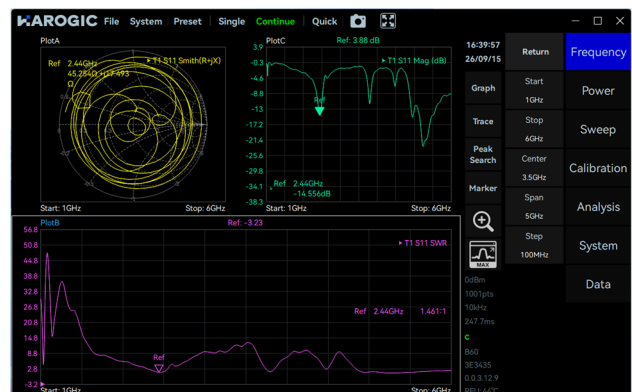

■ Automatic Search and Analysis

Supports bandwidth and X dB searches for quick extraction of key frequency characteristics from traces. DTF analysis converts frequency-domain measurements to the time or distance domain, with multiple transform modes, display formats, and window functions to help locate impedance discontinuities in cables and other devices.

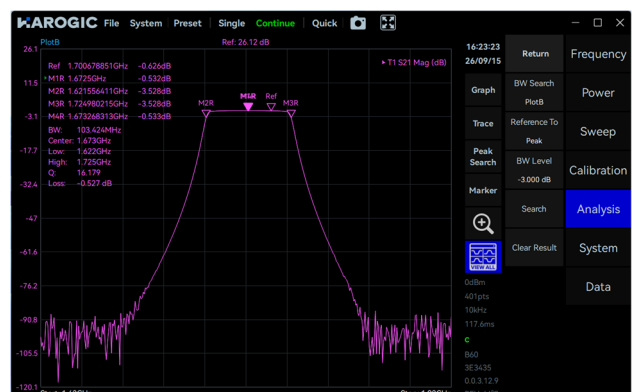

Specifications*

FREQUENCY

Frequency range	100 kHz to 6 GHz
Frequency resolution	≤ 10 Hz
Reference clock	Internal or external
Frequency stability	< ± 2.5 ppm
Aging rate	≤ 1 ppm/year
Sweep points	11 to 65535
IF Bandwidth Range	15 Hz to 75 kHz

S-PARAMETER MEASUREMENT CAPABILITY

Dynamic range 15 Hz IF Bandwidth	100 kHz to 1 MHz	90 dB, 100 dB (typ.)	
	1 MHz to 10 MHz	100 dB, 105 dB (typ.)	
	10 MHz to 3 GHz	115 dB, 120 dB (typ.)	
	3 GHz to 4.5 GHz	110 dB, 115 dB (typ.)	
	4.5 GHz to 6 GHz	110 dB, 115 dB (typ.)	
Corrected System Performance (typ.)	Frequency Range	85033E Mechanical Calibration Kit	ECB-60 Electronic Calibration Module
Directivity	100 kHz to 1 MHz	45 dB	32 dB
	1 MHz to 10 MHz	50 dB	45 dB
	10 MHz to 4.5 GHz	50 dB	48 dB
	4.5 GHz to 6 GHz	44 dB	42 dB
Load match	100 kHz to 1 MHz	40 dB	30 dB
	1 MHz to 10 MHz	46 dB	44 dB
	10 MHz to 4.5 GHz	48 dB	46 dB
	4.5 GHz to 6 GHz	44 dB	42 dB
Source match	100 kHz to 1 MHz	42 dB	25 dB
	1 MHz to 10 MHz	46 dB	44 dB
	10 MHz to 4.5 GHz	46 dB	38 dB
	4.5 GHz to 6 GHz	42 dB	32 dB
Transmission tracking	100 kHz to 1 MHz	± 0.05 dB	± 0.15 dB
	1 MHz to 10 MHz	± 0.03 dB	± 0.05 dB
	10 MHz to 4.5 GHz	± 0.02 dB	± 0.08 dB
	4.5 GHz to 6 GHz	± 0.02 dB	± 0.15 dB

Reflection tracking	100 kHz to 1 MHz	± 0.05 dB	± 0.40 dB
	1 MHz to 10 MHz	± 0.03 dB	± 0.05 dB
	10 MHz to 4.5 GHz	± 0.03 dB	± 0.06 dB
	4.5 GHz to 6 GHz	± 0.03 dB	± 0.10 dB
Trace noise	10 MHz to 6 GHz 1 kHz IF Bandwidth	0.003 dBrms / 0.02 degree rms (typ.)	
Sweep Speed	10 MHz to 6 GHz, 201 points, uncalibrated or one- port calibration	75 kHz IF Bandwidth	45 ms
		10 kHz IF Bandwidth	61 ms
		1 kHz IF Bandwidth	250 ms
	10 MHz to 6 GHz, 201 points, two- port calibration	75 kHz IF Bandwidth	51 ms
		10 kHz IF Bandwidth	85 ms
		1 kHz IF Bandwidth	450 ms

POWER

Range	100 kHz to 10 MHz	-35 dBm to -4 dBm
	10 MHz to 6 GHz	-35 dBm to +5 dBm
Resolution	0.25 dB	
Accuracy	± 1.5 dB	

GENERAL

Input and output			
Data and Power		Single USB Type-C port for USB 2.0 data transfer and 5 V, 1 A power supply Supply voltage range: 4.75 to 5.25 V, ripple < 200 mVpp	
RF Ports		SMA(F), 50 Ω output impedance Damage level: +20 dBm or ± 35 VDC	
External Input	Reference	MMCX female, 10 MHz; input level range: -8 dBm to +10 dBm	
External Trigger Input		Integrated into AUXIO, 3.3 V CMOS	
Trigger Output		Integrated into AUXIO, 3.3 V CMOS	
Weight		≤ 246 g	
Dimensions (L × W × H)		≤ 86 × 70 × 36 mm	
Power Consumption		≤ 4.5 W	
Operating temperature (ambient)		0 to 50 °C	
Storage temperature (ambient)		-20 to 70 °C	
Operating humidity	relative	Ambient Temp.: 0 to 40 °C	5 to 75%
		Ambient Temp.: > 40 °C	5 to 45%

System requirements

Windows 11/10/8/7(x86, x64), Debian 12/11/10(x64, AArch64)
Ubuntu 24.04/22.04/20.04/18.04(x64, AArch64)

Packaging accessories	Non-Kit Version	VNB-60 main unit * 1, USB cable * 1
	Kit Version	VNB-60 main unit *1, matched loads *2, ECB-60 electronic calibration module * 1, USB cables * 2, SMA female-to-female adapter * 1, wrench set * 1 CKB series armored amplitude- and phase-stable cables * 2

*Specifications apply under the following conditions:

- (1) Dynamic range test conditions: 15 Hz IF bandwidth, +5 dBm output power; ambient temperature of 25 °C ($\pm 3^{\circ}\text{C}$), with $< 1^{\circ}\text{C}$ deviation from the calibration temperature.
- (2) Corrected system performance test conditions: 15 Hz IF bandwidth; ambient temperature of 25 °C ($\pm 3^{\circ}\text{C}$), with $< 1^{\circ}\text{C}$ deviation from the calibration temperature.
- (3) Typical and nominal values are not warranted and do not include measurement uncertainty.
- (4) Calibration includes SOLT calibration and isolation calibration by default.
- (5) Specifications are subject to change with hardware and software revisions without notice.

Recommended Accessories

Electronic Calibration Module	ECB-60, 100 kHz to 6 GHz
RF Test Cable	CKB Series Armored Amplitude- and Phase-Stable RF Cable



 www.harogic.com

 info@harogic.com

 +65-8299 8857